

DESCRIPTION: COAXIAL - RIGHT ANGLE - FEMALE

### SPECIFICATIONS:

#### ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.  
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.  
OPERATING TEMPERATURE: -55° C ~ +125° C  
CONTACT RESISTANCE: 30 MilliOHMS Max.  
COAXIAL PINS: 50 OHM

#### MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.  
CONTACT SEPARATOR FORCE: 0.3Kg Min.



#### MATERIALS:

CONTACTS: BRASS  
INSULATOR: PBT UL94V-0 RATED,  
230°C PROCESS TEMP.  
STEEL

SHELL:

FINISH:  
SHELL:


NICKEL

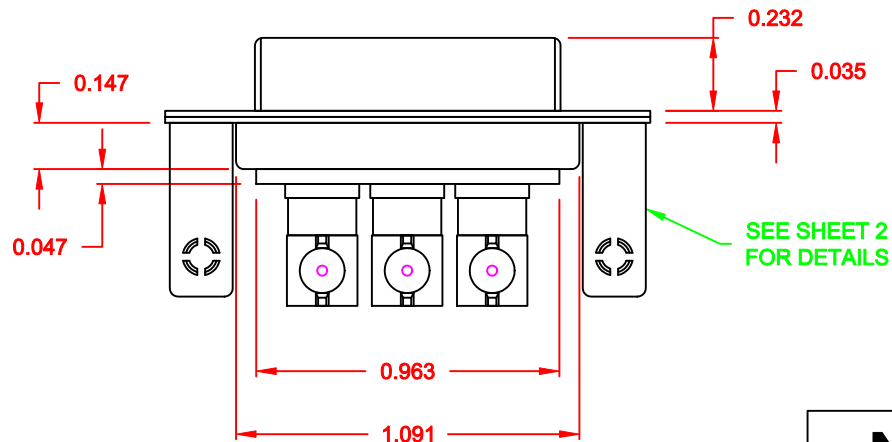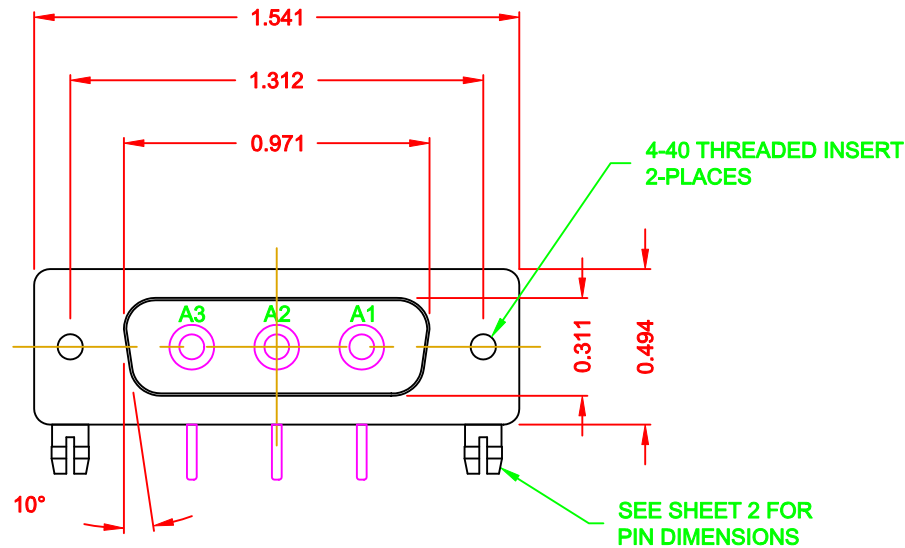



## 6853W3203L461

46 = 4-40 INSERTS /  
BOARD LOCKS


## RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: <b>C. SMITH</b>	DATE: <b>10-10-06</b>
		CHECKED:	DATE:
<b>NorComp</b>	SCALE: <b>1.5 = 1</b>	SHEET <b>1</b> OF <b>2</b>	REV <b>2</b>
	DWG NO. <b>6853W3203L461</b>		

**NOTE:**  
**POWER CONTACTS COME**  
**PRE-LOADED INTO INSULATORS**

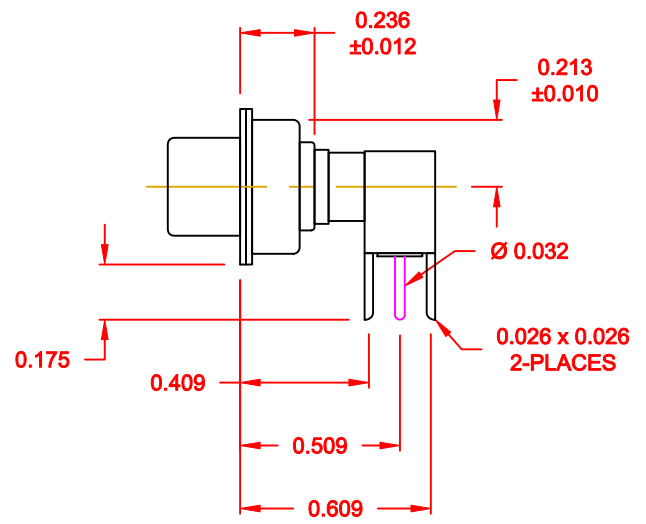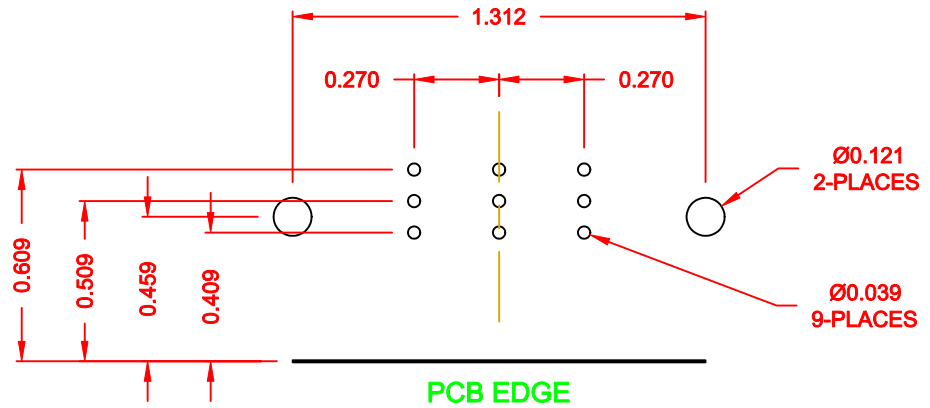

50 OHM COAXIAL CONTACT

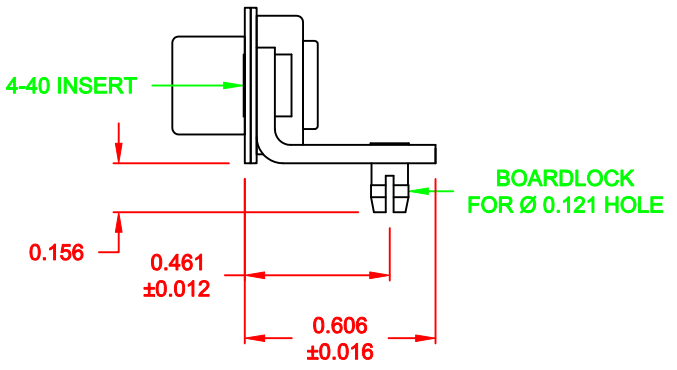

MOUNTING HARDWARE

**RoHS COMPLIANT**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>C. SMITH</b>	DATE: <b>10-10-06</b>
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE: <b>1.5 = 1</b>	SHEET <b>2</b>	OF <b>2</b>	REV <b>2</b>
	DWG NO. <b>6853W3203L461</b>			