
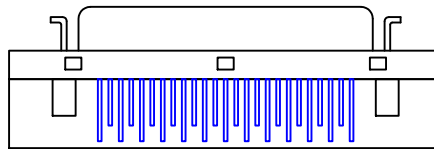
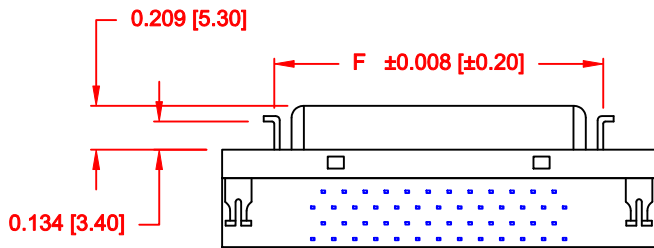
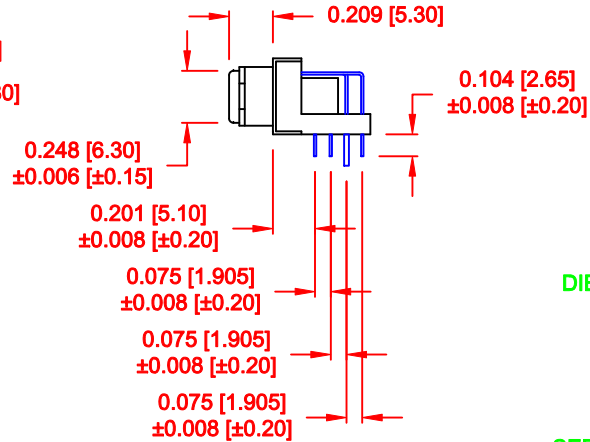


50 PIN SHOWN

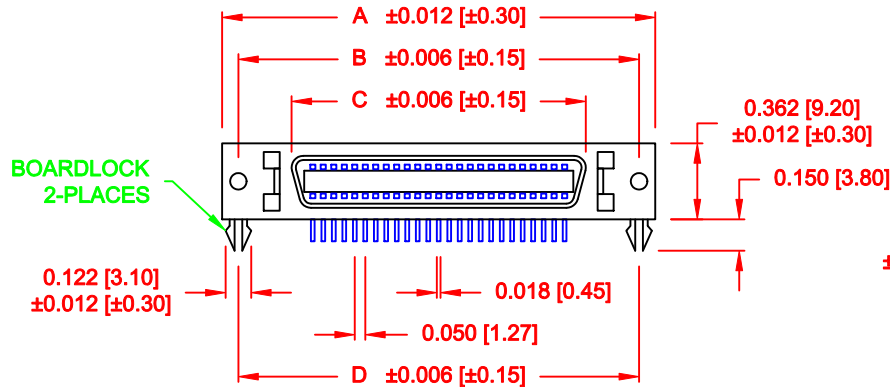

MATERIAL:

- HOUSING & COVER: THERMOPLASTIC, P.B.T. UL94V-0
- CONTACT: PHOSPHOR BRONZE GOLD SELECTIVE PLATED OVER TIN
- SHELL: STEEL, NICKEL OR TIN PLATED
- BRACKET: STEEL, OVER COPPER
- BOARDLOCK: PHOSPHOR BRONZE TIN PLATED OVER COPPER

ELECTRICAL:

- CURRENT RATING: 1 AMPS
- INSULATION RESISTANCE: 500MEGOHMS Min.
- DIELECTRIC WITHSTANDING: 500VAC Min.
- CONTACT RESISTANCE: 35MilliOhms Max.
- TEMPERATURE RANGE: -55°C TO +105°C

118-YYY-2 1 3 L 00 1

- SERIES
- POSITIONS
- 050
- 068
- 100
- GENDER
- 2 = FEMALE
- TERMINATION
- 1 = DIP SOLDER
- SHELL PLATING
- 3 = NICKEL PLATED
- RoHS COMPLIANT (LOW TEMP. PROCESS)
- HARDWARE OPTIONS
- 00 = LATCH LOCKS (M2.6) / BOARDLOCKS
- PLATING OPTIONS
- 1 = GOLD FLASH

DIMENSIONS

No. OF PINS	A	B	C	D	E	F
50	2.064	1.909	1.397	1.909	1.200	1.568
	52.43	48.50	35.49	48.50	30.48	39.82
68	2.520	2.281	1.847	2.281	1.650	2.020
	64.00	57.93	46.92	57.93	41.91	51.32
100	3.315	3.081	2.643	3.081	2.451	2.820
	84.18	78.25	67.14	76.25	62.23	71.64

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 02-17-09

CHECKED: DATE:


NorComp

SCALE: 1:1 SHEET 1 OF 2 REV 4

DWG NO. 118-YYY-213L001


RoHS COMPLIANT

50 PIN SHOWN

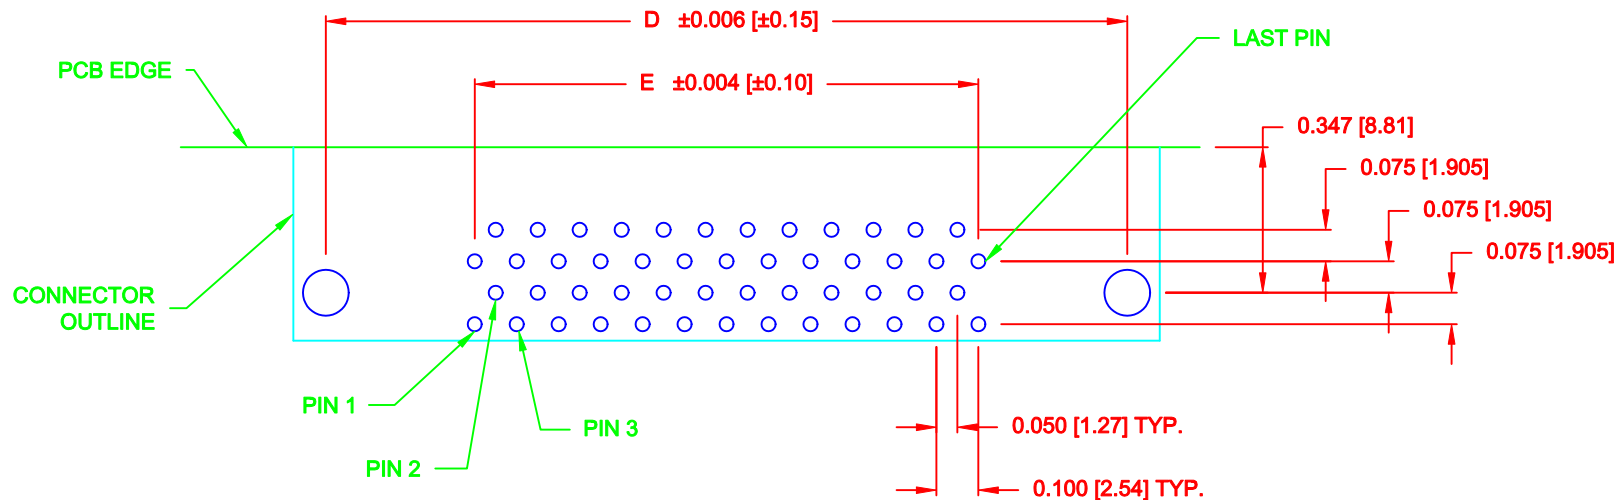

RECOMMENDED PCB LAYOUT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH	DATE: 02-17-09
		CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 2 : 1	SHEET 2 OF 2
		REV 4 DWG NO. 118-YYY-213L001	

RoHS COMPLIANT