
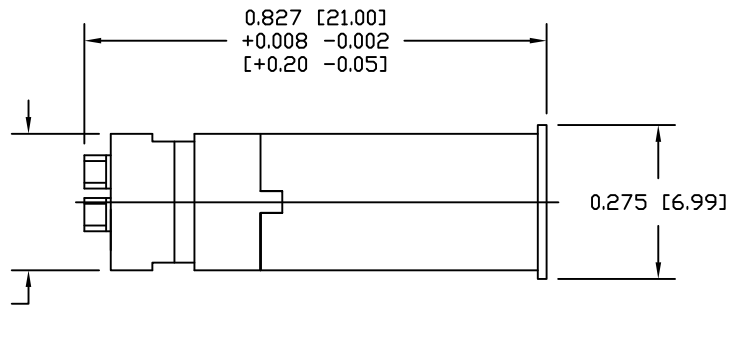


DESCRIPTION: M8 MALE - CABLE MOUNT - SOLDER CUP - 4 POS.

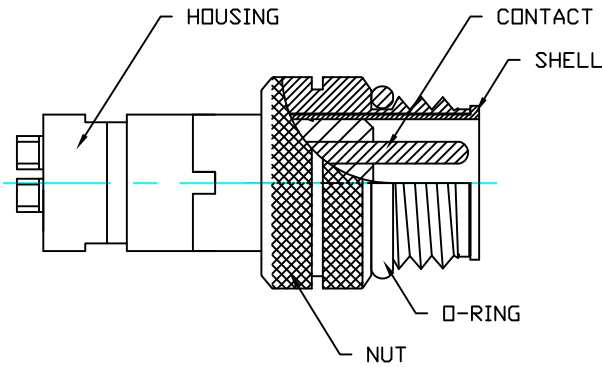

0.244 [6.20]
+0.002 -0.004
[+0.05 -0.10]

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: COPPER ALLOY
NUT: COPPER ALLOY
SHELL: COPPER ALLOY
O-RING: NBR, BLACK

FINISH



CONTACT: GOLD PLATED
OVER 50 μ NICKEL
NUT: NICKEL PLATED 60-100 μ OVER ALL
SHELL: NICKEL PLATED 60-100 μ OVER ALL

ELECTRICAL


RATED CURRENT: 5A
RATED VOLTAGE: 125V
INSULATION RESISTANCE: 1000 M Ω hms MIN.
CONTACT RESISTANCE: 10 m Ω hms MAX.
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 24-28 AWG

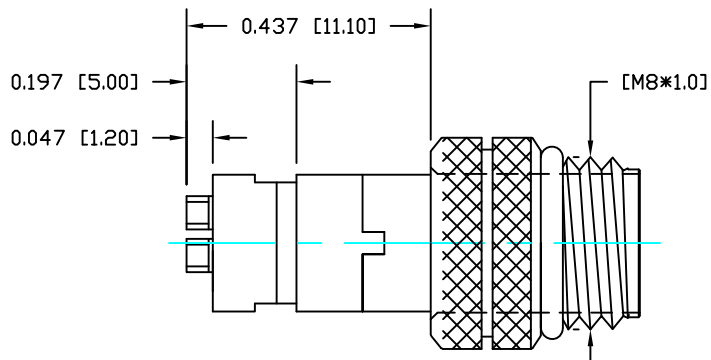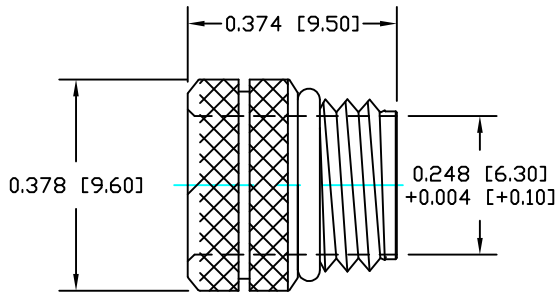

854-004-103RLSY

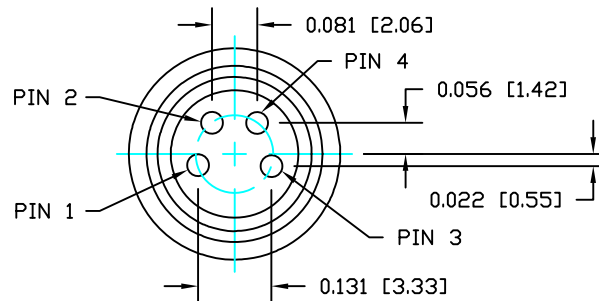

1 = GOLD FLASH
4 = 10 μ GOLD

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

DATE: 03-04-16

CHECKED:

DATE:

NorComp

SCALE: N.T.S.

SHEET 1 OF 1

REV 2

DWG NO.

854-004-103RLSY