

DIMENSIONS (mm)				
NUMBER OF CONTACTS	Α	В	С	D
15	30.80	24.99	16.34	19.20
26	39.20	33.32	24.70	27.70

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:

1000 M Ω MIN.

WORKING VOLTAGE:

250V -50°C TO +100°C

CONTACT RESISTANCE: CONTACT AMPERAGE:

OPERATING TEMPERATURE:

15 m Ω MAX. 3 AMPS

MATERIALS:

CONTACTS:

BRASS


SHELL

GOLD FLASH IN MATING AREA TIN PLATING ON TAIL ENDS

STEEL, NICKEL PLATED

INSULATOR PBT, UL94-V0

(PROCESS TEMP 230°C)

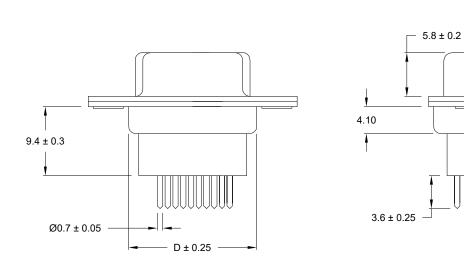

 $A \pm 0.30$


 $B \pm 0.10$

 $C \pm 0.15$ -

00000

00000

 12.6 ± 0.3



ROHS COMPLIANT

 7.90 ± 0.15



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. DRAWN: P. JENKINS

DATE: 09/15/2005 UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

0.9

SCALE: SHEET NTS 1 DWG NO.

198-YYY-213LYY1


OF


3

REV

3

DESCRIPTION: VERTICAL - HIGH PROFILE - STAMPED





HOLE PATTERN SHOWN ARE FOR FEMALE

★ TYP. SUGGESTED SIZE MAY NOT BE SUITABLE FOR ALL APPLICATIONS

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT APPARATUS WITHOUT WRITTEN PERMISSION. DRAWN: P. JENKINS

DATE:

09/15/2005

UNITS = inches

NorComp

DO NOT SCALE FROM DRAWING


SCALE: SHEET 2 NTS DWG NO.

198-YYY-213LYY1

3


REV

3




HARDWARE OPTIONS:





03 = #4-40 HEX STANDOFF



Rohs Compliant

风

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

P. JENKINS

DATE: 09/15/2005

UNITS = mm

DO NOT SGALE FROM DRAWING

REV

3

NorComp

SCALE: SHEET OF 3 3

DWG NO. 198-YYY-213LYY1