



# SEAL-D<sup>®</sup>

*Designed for IP Performance*



*SEAL-D<sup>®</sup> I/O Connectors utilize a proprietary sealing technology which maintains the same physical size and footprint as standard D-Sub products. This reduces space on new designs & eliminates the need to redesign enclosures and PC boards when implementing IP66/IP67 design upgrades.*

## FEATURES & BENEFITS

- **Signal / low power in 6 standard sizes**  
Standard 8 | 15 | 25 | High Density 15 | 26 | 44
- **Available in 12 POWER-D configurations**  
3W3, 5W1, 5W5, 7W2, 8W8, 9W4  
11W1, 13W3, 17W2, 21W1, 21WA4
- **Solder cup, vertical mount, & right angle board mount**
- **Screw machined contacts for high mating cycles**
- **Power contacts rated for 20/40 AMPs**
- **Signal contacts rated for 3 - 5 AMPs**
- **-55C to +105C operating temperature range**
- **IP67 rating guarantee**
- **MADE IN THE USA**



**NORCOMP**

## Designed for IP Performance

*Ruggedized &  
Reliable*

### IP67 Standard D-Subs

|                              | Series          | Sizes                |
|------------------------------|-----------------|----------------------|
| Solder Cup Cable Mount       | 772-EYY-Y03RYY1 | 9 / 15 / 25 Position |
| Vertical PCB Mount           | 772-EYY-Y13RYY1 | 9 / 15 / 25 Position |
| Right Angle 0.283" Footprint | 773-EYY-Y13RYY1 | 9 / 15 / 25 Position |
| Right Angle 0.370" Footprint | 774-EYY-Y13RYY1 | 9 / 15 / 25 Position |

### IP67 High-Density D-Subs

|                        | Series          | Sizes                 |
|------------------------|-----------------|-----------------------|
| Solder Cup Cable Mount | 780-MYY-Y03LYY1 | 15 / 26 / 44 Position |
| Vertical PCB Mount     | 780-MYY-Y13RYY1 | 15 / 26 / 44 Position |
| Right Angle            | 781-MYY-113RYY1 | 15 / 26 / 44 Position |

### IP67 POWER-D


|                        | Series         | Sizes                 |
|------------------------|----------------|-----------------------|
| Solder Cup Cable Mount | 680SYWYY03LY01 | 3W3, 5W1, 5W5, 7W2    |
| Vertical PCB Mount     | 681SYWYY03L001 | 9W4, 11W1, 13W3, 13W6 |
| Right Angle            | 684SYWY103L461 | 17W2, 21W1, 21WA4     |

### IP66 Standard D-Subs

|                              | Series          | Sizes                |
|------------------------------|-----------------|----------------------|
| Solder Cup Cable Mount       | 671-YYY-103LYY1 | 9 / 15 / 25 Position |
| Vertical PCB Mount           | 671-YYY-113RYY1 | 9 / 15 / 25 Position |
| Right Angle 0.318" Footprint | 682-YYY-113RYY1 | 9 / 15 / 25 Position |
| Right Angle 0.590" Footprint | 683-YYY-113RYY1 | 9 / 15 / 25 Position |

### IP66 High-Density D-Subs

|                                | Series          | Sizes                 |
|--------------------------------|-----------------|-----------------------|
| Solder Cup Cable Mount         | 680-YYY-103LYY1 | 15 / 26 / 44 Position |
| Vertical PCB Mount             | 680-YYY-113RYY1 | 15 / 26 / 44 Position |
| Vertical PCB Mount Low Profile | 695-YYY-113LYY1 | 15 / 26 / 44 Position |
| Right Angle                    | 681-YYY-113RYY1 | 15 / 26 / 44 Position |

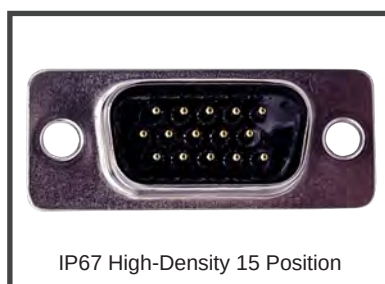

*Screw machined  
contacts for high  
mating cycles*

