



(View the [NorComp D-Sub Connector Catalog](#).)

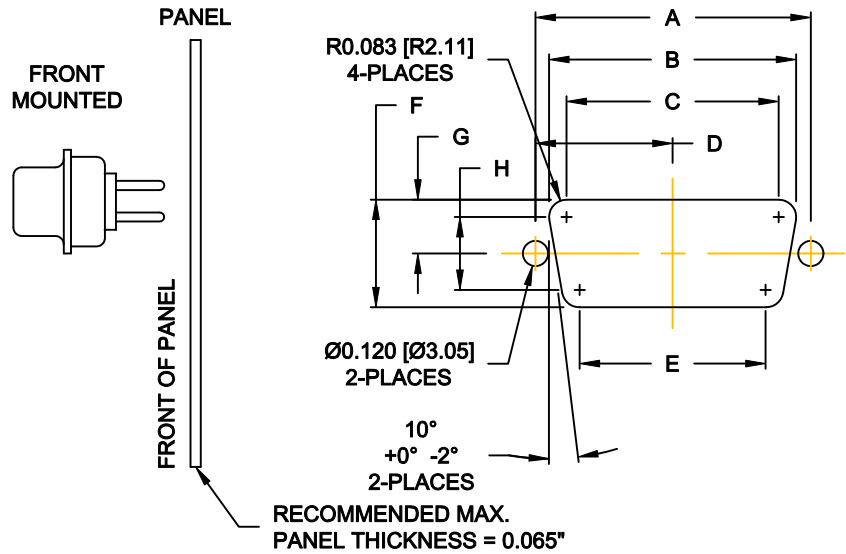

FRONT MOUNTED

	A	B	C	D	E	F	G	H
9 STD / 15 H.D.	0.984 [24.99]	0.874 [22.20]	0.708 [17.98]	0.492 [12.50]	0.583 [14.80]	0.460 [11.68]	0.230 [5.84]	0.347 [8.81]
15 STD / 26 H.D.	1.312 [33.32]	1.202 [30.53]	1.036 [26.31]	0.656 [16.66]	0.911 [23.13]	0.460 [11.68]	0.230 [5.84]	0.347 [8.81]
25 STD / 44 H.D.	1.852 [47.04]	1.743 [44.27]	1.577 [40.05]	0.926 [23.52]	1.452 [36.88]	0.460 [11.68]	0.230 [5.84]	0.347 [8.81]
37 STD / 62 H.D.	2.500 [63.50]	2.391 [60.73]	2.225 [56.51]	1.250 [31.75]	2.100 [53.33]	0.460 [11.68]	0.230 [5.84]	0.347 [8.81]
50 STD / 78 H.D.	2.406 [61.11]	2.297 [58.34]	2.131 [54.12]	1.203 [30.54]	1.966 [49.93]	0.623 [15.82]	0.312 [7.91]	0.457 [11.61]

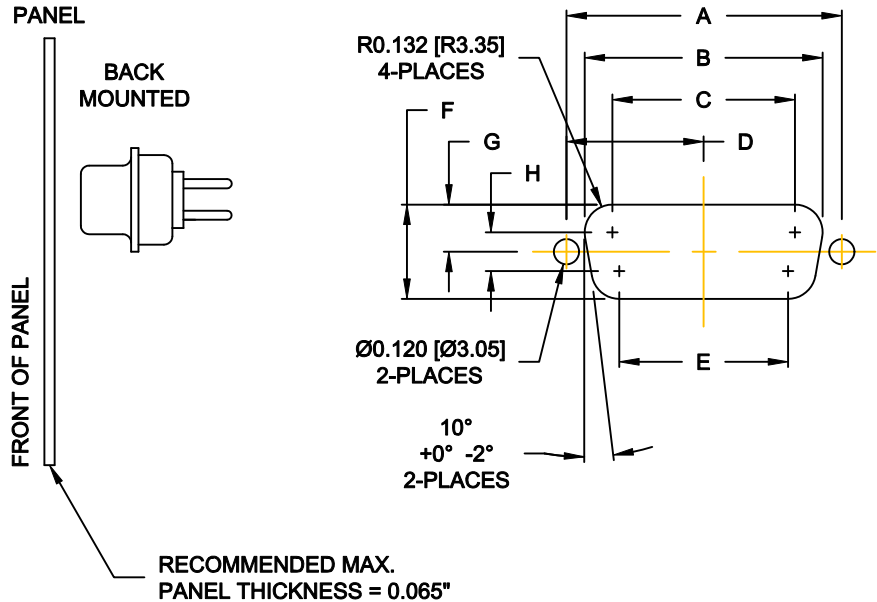

BACK MOUNTED

	A	B	C	D	E	F	G	H
9 STD / 15 H.D.	0.984 [24.99]	0.806 [20.47]	0.542 [13.77]	0.492 [12.50]	0.473 [12.01]	0.420 [10.67]	0.210 [5.33]	0.156 [3.96]
15 STD / 26 H.D.	1.312 [33.32]	1.134 [28.80]	.870 [22.10]	0.656 [16.66]	0.801 [20.35]	0.420 [10.67]	0.210 [5.33]	0.156 [3.96]
25 STD / 44 H.D.	1.852 [47.04]	1.674 [42.52]	1.410 [35.81]	0.926 [23.52]	1.341 [34.06]	0.420 [10.67]	0.210 [5.33]	0.156 [3.96]
37 STD / 62 H.D.	2.500 [63.50]	2.326 [59.08]	2.062 [52.37]	1.250 [31.75]	1.993 [50.62]	0.420 [10.67]	0.210 [5.33]	0.156 [3.96]
50 STD / 78 H.D.	2.406 [61.11]	2.218 [56.34]	1.954 [49.63]	1.203 [30.54]	1.846 [46.90]	0.555 [14.10]	0.278 [7.05]	0.291 [7.39]



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 03-21-09

CHECKED: DATE:

NorComp

SCALE: 1 : 1 SHEET 1 OF 1 REV 10

DWG NO. PANEL CUTOUTS D-SUB - SINGLE